
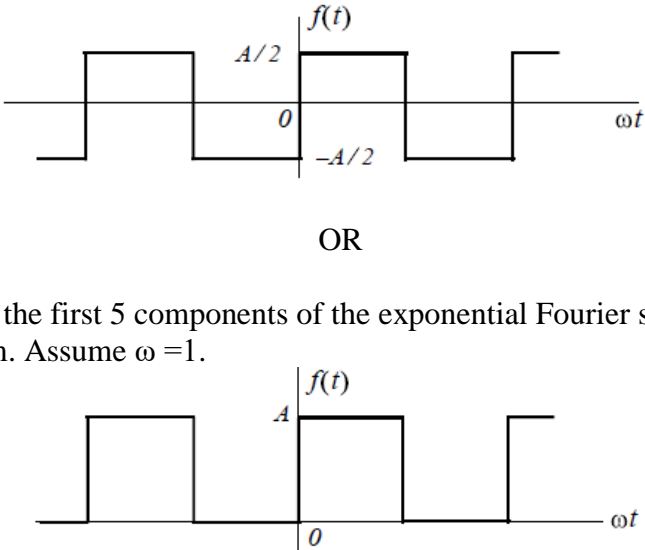
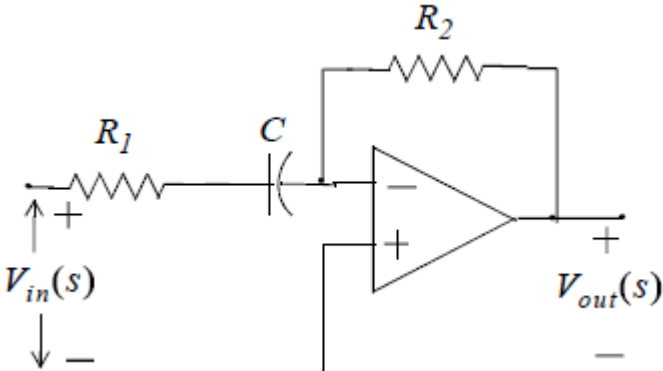
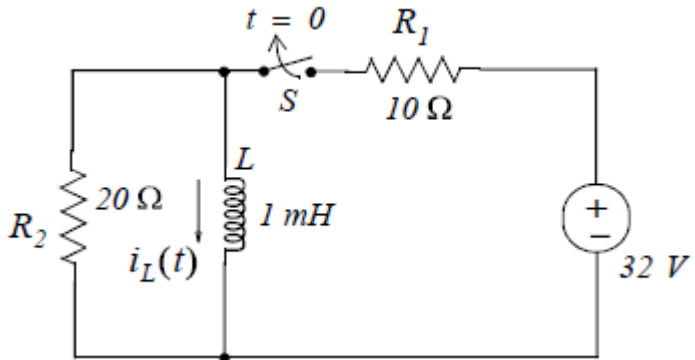
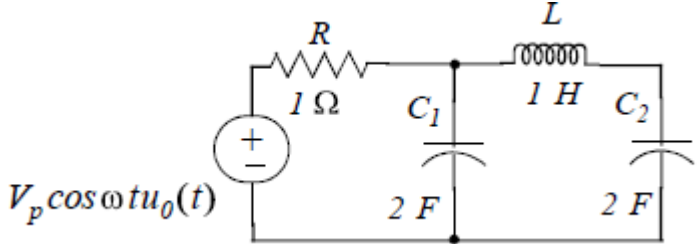
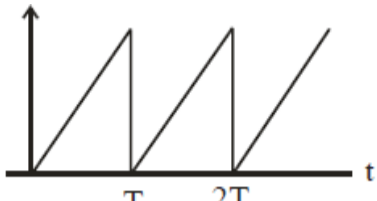
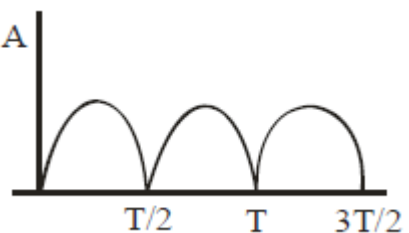


Name:			
Enrolment No:			
<b>UPES</b> <b>End Semester Examination, December 2024</b>			
<b>Course: Signals and Systems</b> <b>Program: B.Tech EE</b> <b>Course Code: ECEG2045</b>		<b>Semester: III</b> <b>Time : 03 hrs.</b> <b>Max. Marks: 100</b>	
<b>Instructions: Read all the questions carefully. You can do it. All the best!</b>			
<b>SECTION A</b> <b>(5Qx4M=20Marks)</b>			
S. No.		Marks	CO
Q 1	Use the Initial Value Theorem to find $x(0)$ given that the Laplace transform of $x(t)$ is $(2s + 3) / (s^2 + 4.25s + 1)$	4	CO2
Q 2	Use the partial fraction expansion method to compute the Inverse Z transform of $F(z) = \frac{1 + 2z^{-1} + z^{-3}}{(1 - z^{-1})(1 - 0.5z^{-1})}$	4	CO2
Q 3	If 'a' is a real constant, and $F(\omega)$ is the Fourier transform of $f(t)$ , then prove, $f(at) \Leftrightarrow \frac{1}{ a } F\left(\frac{\omega}{a}\right)$	4	CO2
Q 4	For the signals $x(t) = u(t)$ and $y(t) = u(t)$ , determine the convolution result of $x(t)*y(t)$ .	4	CO2
Q 5	Find the Laplace transform of the following time domain functions: a) 12 b) $6 u(t)$ c) $24 u(t-12)$ d) $5 t u(t)$	4	CO2
<b>SECTION B</b> <b>(4Qx10M= 40 Marks)</b>			
Q 6	Compute the first 5 components of the exponential Fourier series for the waveform. Assume $\omega = 1$ .	10	CO3

	 <p style="text-align: center;">OR</p> <p>Compute the first 5 components of the exponential Fourier series for the waveform. Assume <math>\omega = 1</math>.</p>		
Q 7	<p>Derive the transfer function for the network shown below.</p> 	<b>10</b>	<b>CO3</b>
Q 8	<p>Derive the Fourier transform of <math>x(t) = A [u(t + 3T) - u(t + T) + u(t - T) - u(t - 3T)]</math></p>	<b>10</b>	<b>CO3</b>
Q 9	<p>In the circuit, switch S has been closed for a long time and opens at <math>t=0</math>. Use the Laplace transform method to compute <math>i_L(t)</math> for <math>t&gt;0</math>.</p> 	<b>10</b>	<b>CO3</b>
<p><b>SECTION-C</b> <b>(2Qx20M=40 Marks)</b></p>			

<p>Q 10</p>	<p>Calculate the Z-Transform of the following signals &amp; draw its ROC.</p> <ul style="list-style-type: none"> <li>a) Unit Impulse</li> <li>b) Unit Ramp</li> <li>c) Unit Step</li> <li>d) Sgnm</li> </ul> <p style="text-align: center;">OR</p> <p>In the circuit shown below, all initial conditions are zero. Write state equations in matrix form.</p> <div style="text-align: center;">  </div>	<p><b>20</b></p>	<p><b>CO4</b></p>
<p>Q 11</p>	<p>Find Laplace Transform of the following periodic waveforms.</p> <p>(a)</p>  <p>(b)</p> 	<p><b>20</b></p>	<p><b>CO4</b></p>