

Name:

Enrolment No:



UNIVERSITY OF PETROLEUM AND ENERGY STUDIES
Supplementary Examination, May- 2022

Course: Heat Transfer
Program: B. Tech (APE Gas)
Course Code: CHCE 2009

Semester: 4
Time: 03 hrs.
Max. Marks: 100


Instructions:

1. This is a **closed book** examination. Please write your answers with detailed information, wherever required.
2. In case of any **missing data** or information, make necessary **assumptions** with proper reason.

SECTION A


S. No.	Statement of the questions	Marks	CO
Q 1	Write the expression for conduction heat flux and convection heat flux with its S.I. units. Write the nomenclature for any symbols or letters used to denote any property/parameter in the expression.	5	CO1
Q 2	Write the expression for transient one dimensional conduction equation with constant thermal conductivity and a heat source. Write the nomenclature for any symbols or letters used to denote any property/parameter in the expression.	5	CO2
Q 3	What is Biot number? Write its expression and its significance	5	CO3
Q 4	State the Stefan–Boltzmann law for a blackbody. How can the law be applied to a real bodies.	5	CO4
Q 5	What is fouling? Mention one example, where it is encountered, and mention 2 (two) methods by which it can be avoided.	5	CO5
Q 6	State the no-slip condition, and no temperature jump condition. Mention one similarity or difference (<i>any one</i>) between them.	5	CO3

SECTION B

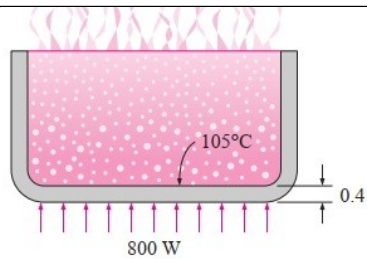Q 7	An aluminum pan whose thermal conductivity is k_{roll} W/m · °C has a flat bottom with diameter 20 cm and thickness 0.4 cm. Heat is transferred steadily to boiling water in the pan through its bottom at a rate of 800 W. If the inner surface of the bottom of the pan is at 105°C, determine the temperature of the outer surface of the bottom of the pan. Mention all necessary assumptions. Here, k_{roll} = last two digits of your roll number. For, example: If, Roll number: R820219007, then thermal conductivity, k_{roll} = 07 W/m · °C		10	CO1
Q 8	Consider a 5-m-high, 8-m-long, and 0.22-m-thick wall whose representative cross section is as given in the figure below. The thermal conductivities of various		10	CO2

materials used, in $\text{W/m} \cdot ^\circ\text{C}$, are $k_A = k_F = 2$, $k_B = 8$, $k_C = 20$, $k_D = k_{\text{roll}}$, and $k_E = 35$. The left and right surfaces of the wall are maintained at uniform temperatures of 300°C and 100°C , respectively. Determine, (a) the rate of heat transfer through the wall; (b) the temperature at the point where the sections B, D, and E meet represented by red dashed circle; and (c) the temperature drop across the section F. Mention other necessary assumptions with proper reasons for each.

Here, $k_{\text{roll}} =$ last two digits of your roll number. **For, example:** If, Roll number: R820219007, then thermal conductivity, $k_{\text{roll}} = 07 \text{ W/m} \cdot ^\circ\text{C}$

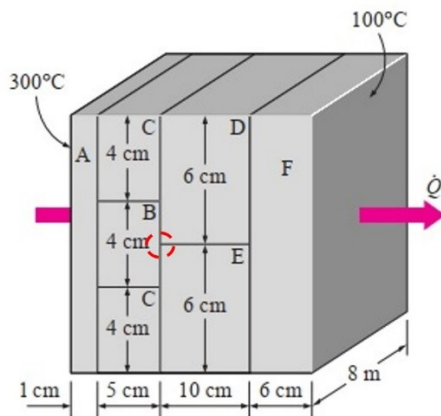

Q 9

Engine oil at 60°C flows over the upper surface of a 5-m-long, width 10 m, and height, 1 m, flat plate whose temperature is 20°C with a velocity of 2 m/s, shown in the image below. Determine the (i) total drag force and the (ii) heat flux over the entire plate. Mention all necessary assumptions.

Given data: Density = 876 kg/m^3 , $k = 0.144 \text{ W/m} \cdot ^\circ\text{C}$, Kinematic viscosity = $242 \times 10^{-6} \text{ m}^2/\text{s}$, thermal diffusivity = $0.012 \times 10^{-6} \text{ m}^2/\text{s}$, specific heat = $500 \text{ J/kg} \cdot ^\circ\text{C}$


Use the following correlations:

For laminar flow,

Drag coefficient, $C_D = 24/Re$ & Nusselt number, $Nu = 0.664 Re^{0.5} Pr^{1/3}$

For turbulent flow,

Drag coefficient, $C_D = 0.44$ & $Nu = 0.664 Re^{0.2} Pr^{0.5}$

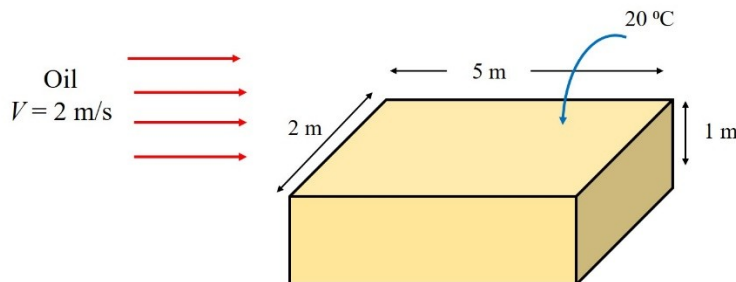

10

CO3

Q 10

Derive the expression for heat transfer coefficient due to radiation heat transfer with all necessary assumptions.

10

CO4

Q 11 Describe the working principle of any three (3) type of heat exchanger with labelled diagram.

10

CO5


OR

Derive the expression for log mean temperature difference in a double pipe heat

exchanger. Mention all necessary assumptions.

SECTION C

- Q 12 A counter-flow double-pipe heat exchanger is to heat water from 40 °C to 80 °C at a rate of 1.2 kg/s. The heating is to be accomplished by geothermal water available at 150 °C at a mass flow rate of 3 kg/s. The inner tube is thin-walled and has a diameter of 1.5 cm. If the overall heat transfer coefficient of the heat exchanger is 640 W/m² · °C, determine the **length of the heat exchanger** required to achieve the desired heating. The specific heat of water and geothermal fluid is 4.18 and 4.31, with units, kJ/kg·°C. Mention the necessary assumptions.

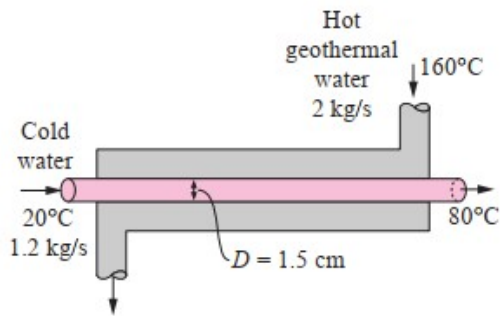


OR

Hot oil is to be cooled in a double-tube counter-flow heat exchanger. The copper inner tubes have a diameter of 2.5 cm and negligible thickness. The inner diameter of the outer tube (the shell) is 3.5 cm. In addition, water flows through the tube at a rate of 0.5 kg/s, and the oil through the shell at a rate of 0.9 kg/s. Taking the average temperatures of the water and the oil to be 45 °C and 80 °C, respectively, **determine the overall heat transfer coefficient** of this heat exchanger. Mention all necessary assumptions with its reasons.

Here, Nusselt number, $Nu = 0.028 Re^{0.8} Pr^{0.4}$ (for turbulent flow) and the value of Nu for laminar flow is provided in the table.

The properties of water at 45°C are: $\rho = 990 \text{ kg/m}^3$, $Pr = 3.91$, $k = 0.637 \text{ W/m} \cdot \text{°C}$, kinematic viscosity, $\nu = 0.602 \times 10^{-6} \text{ m}^2/\text{s}$.

The properties of oil at 80°C are: $\rho = 852 \text{ kg/m}^3$, $Pr = 490$, $k = 0.138 \text{ W/m} \cdot \text{°C}$, kinematic viscosity, $\nu = 37.5 \times 10^{-6} \text{ m}^2/\text{s}$

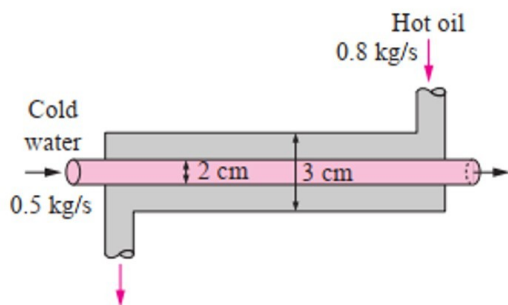

Nu for laminar flow

D_i/D_o	Nu_i	Nu_o
0.00	—	3.66
0.05	17.46	4.06
0.10	11.56	4.11
0.25	7.37	4.23
0.50	5.74	4.43
1.00	4.86	4.86

20

CO5